



SMF IC600/SMF IC600+

The SMF IC600 combines advanced carbon media with superior ultrafiltration technology to guarantee the best filtration performance.

A high capacity filter with an excellent flow rate.

- Unique ultra-high porosity, catalytic carbon creates an extra large active surface area for removing contaminants.
- 100% binder-free, gas-activated carbon maximizes capacity for longer-lasting cartridges.
- Vortex flow combines turbo and radial flow to increase contact time, minimize pressure drop and fully utilize the media filtration capacity for maximum efficiency.
- Adsorptive technology consisting of 400 layers of proprietary nano-alumina fibers with electrostatic properties inhibits scale formation and reduces contaminants such as lead, VOC, bacteria (99.99%) and heavy metals.*




Specifications:

Dimensions	
System (w x d x h)	335 x 230 x 483 mm
Weight	4.5kg
Flow	
Flow Rate	18.9 litres/minute
Production	
Filter Capacity	189,271 litres
System	
Temperature Range	4 - 39 °C
Pressure Range	2.1 - 6.9 bar



*SMF IC600+ only

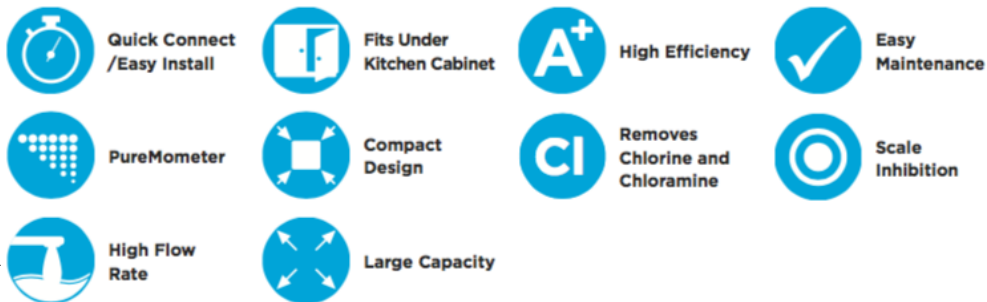

ASSOCIATA



ASSOCIAZIONE COSTRUTTORI TRATTAMENTI ACQUE PRIMARIE



FEDERATA
FEDERAZIONE DELLE ASSOCIAZIONI NAZIONALI
DELL'INDUSTRIA MECCANICA VARIA ED AFFINI

CONFINDUSTRIA

